

Data Sheet


HYDRATE BAGGING FILMS

How to make nylon film soft and flexible if it has lost moisture

■ DESCRIPTION

Moisture is the plasticizer in nylon. If you lose the moisture that was put in the film at the time of the manufacturer, the film becomes brittle. For most nylon film, the relative humidity (RH) at 55% will retain the original moisture. Any RH under 55% will start immediate moisture loss. At 40% RH, standard nylon film can lose its moisture in 24 hours. At 40% RH, Ippilon and Wrightlon will hold their moisture for 3 weeks due to blocking agents that stop moisture migration. Best procedure is to store all nylon film at 55% RH or higher.

If you experience dry bagging film due to excessive time in low humidity environments (under 50%), below is a diagram of how to re-hydrate the film. The time to add moisture back to nylon film is dependent on the size of roll, percent loss of moisture, and rate at which hydration is applied to the film.

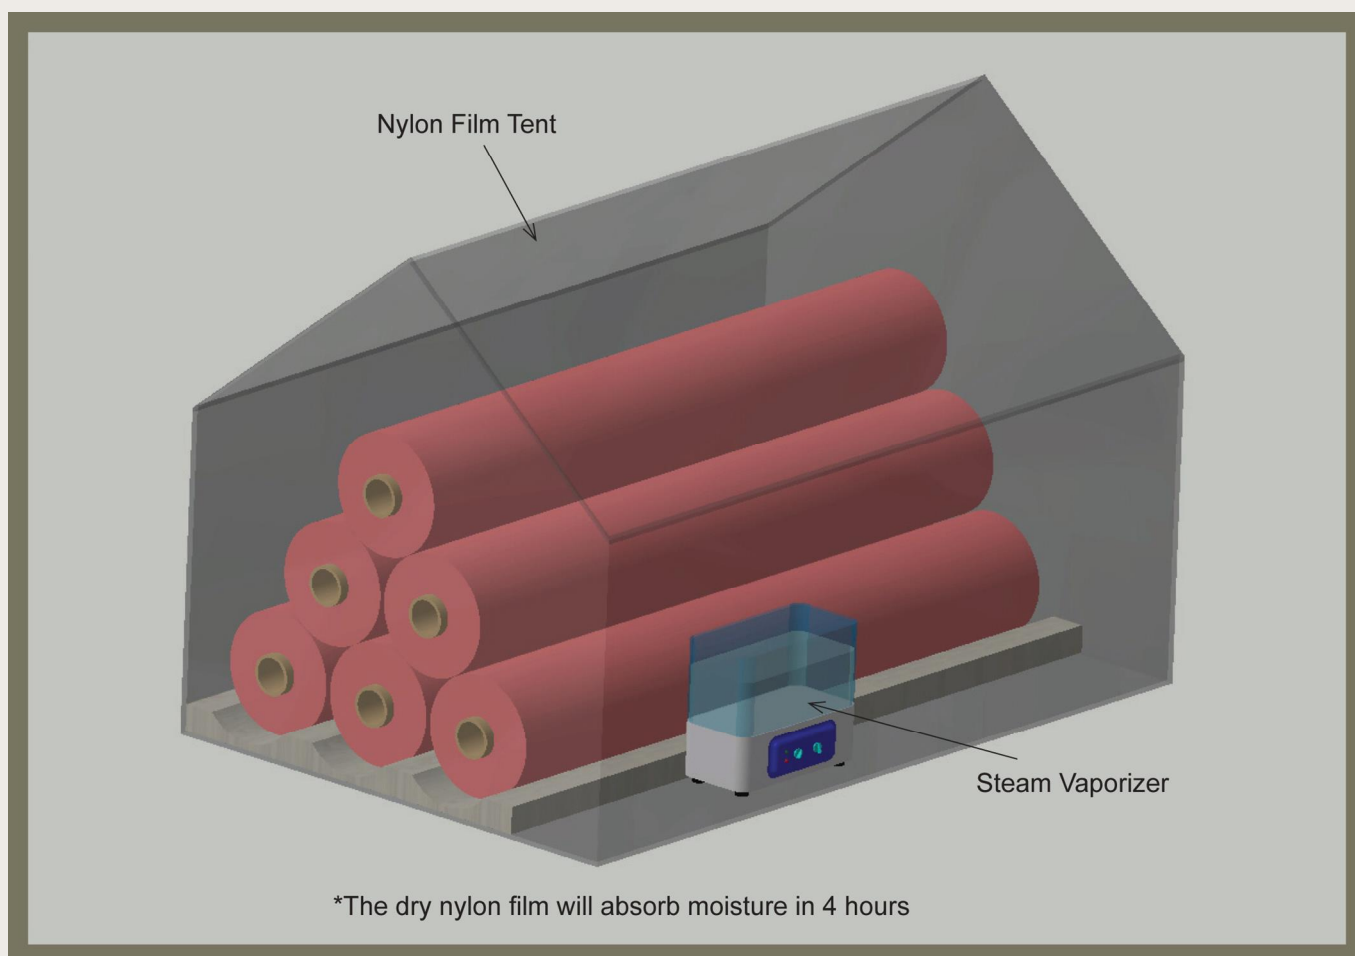

Last updated : 2015-12-21

Catalogue position : [Bagging films](#)

Data Sheet

RESIN COMPATIBILITY

Vacuum bag film selection guide

NOTE

The following guideline is intended for reference only. Tygavac cannot control processing parameters or test all the materials available. Vacuum bagging film samples are available. Risk reduction panel testing is strongly recommended. Film selection should be based on temperature requirement.

Maximum Use Temperature	Bagging Films	Resin Type				
		Epoxy	Polyester and Vinyl ester	Phenolic	Bismaleimide BMI	Cyanate Ester
121°C (250°F)	Securlon® Big Blue L-100	✓	✓	X	X	X
121°C (250°F)	Stretchlon® 200	✓	X	✓	X	✓
121°C (250°F)	Airdraw 2	✓	✓	X	✓	✓
140°C (285°F)	Dahlar® Release Bag 125	✓	✓	✓	✓	✓
140°C (285°F)	NBF 125C	✓	✓	X	✓	✓
155°C (311°F)	Dahlar® Release Bag 375	✓	✓	✓	X	X
162°C (325°F)	Stretchlon® HT-350	✓	X	✓	✓	✓
171°C (340°F)	Securlon® V-45	✓	✓	✓	X	X
171°C (340°F)	Securlon® L-500Y	✓	✓	X	✓	✓
177°C (350°F)	Econolon	✓	✓	X	✓	✓
177°C (350°F)	Wrightlon® 5400	✓	✓	X	✓	✓
190°C (374°F)	Dahlar® Release Bag 460	✓	X	✓	✓	✓
195°C (385°F)	Stretchlon® 700	✓	X	✓	X	✓
204°C (400°F)	Wrightlon® 600V	✓	✓	X	✓	✓
204°C (400°F)	Securlon® L-1000	✓	✓	X	✓	✓
204°C (400°F)	Stretchlon® 800	✓	✓	X	✓	✓
204°C (400°F)	Stretchlon® 850	✓	✓	X	✓	✓
204°C (400°F)	Wrightlon® 6400	✓	✓	X	✓	✓
204°C (400°F)	Wrightlon® 7400	✓	✓	X	✓	✓
212°C (414°F)	Ipplon® KM1300	✓	✓	X	✓	✓
212°C (414°F)	Ipplon® DP1000	✓	✓	X	✓	✓
218°C (425°F)	Securlon® L-2000	✓	✓	✓	✓	✓
230°C (446°F)	Dahlar® Release Bag 500	✓	✓	✓	✓	✓
232°C (450°F)	Wrightlon® 8400	✓	✓	✓	✓	✓
246°C (475°F)	Ipplon® DPT1000	✓	✓	✓	✓	✓
246°C (475°F)	Ipplon® WN1500	✓	✓	✓	✓	✓
426°C (799°F)	Thermalimide E	✓	✓	✓	✓	✓

Key

✓ Compatible

X Avoid

Last updated : 2015-12-11

Catalogue position : [Bagging films](#)

Data Sheet


COMMONLY USED SIZES

Bagging Films


BIG BLUE L-100

Thickness	Width	Length	Weight/Roll	Forms Available*
75 µm (0.003 inch)	4 m (13 feet)	170 m (558 feet)	53 kg (116 lbs)	CF
75 µm (0.003 inch)	6 m (20 feet)	110 m (361 feet)	52 kg (115 lbs)	SWF
75 µm (0.003 inch)	8 m (26 feet)	83 m (272 feet)	51 kg (113 lbs)	DWF
75 µm (0.003 inch)	10 m (33 feet)	67 m (220 feet)	53 kg (116 lbs)	MWF
75 µm (0.003 inch)	12 m (39 feet)	56 m (184 feet)	52 kg (114 lbs)	MWF


Big Blue L-100 Forms Available:



*CF=Centerfold



SWF=Single
W-Fold



DWF=Double
W-Fold



MWF=Multiple
W-Fold

SECURLON® V-45


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	0.60 m (24 inches)	305 m (1000 feet)	22 kg (48 lbs)	LFT
50 µm (0.002 inch)	0.91 m (36 inches)	305 m (1000 feet)	33 kg (72 lbs)	LFT
50 µm (0.002 inch)	1.22 m (48 inches)	305 m (1000 feet)	44 kg (96 lbs)	LFT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	54 kg (120 lbs)	LFT

SECURLON® L-500Y


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	2.99 m (118 inches)	152 m (500 feet)	47.55 kg (104 lbs)	LFT
50 µm (0.002 inch)	6.07 m (237 inches)	120 m (394 feet)	38.3 kg (84 lbs)	CF to 3 m (118.5 inches)
75 µm (0.003 inch)	2.99 m (118 inches)	120 m (394 feet)	27.6 kg (61 lbs)	SHT (Folded)
75 µm (0.003 inch)	1.52 m (60 inches)	305 m (1000 feet)	35.7 kg (79 lbs)	SHT
75 µm (0.003 inch)	3.05 m (120 inches)	228 m (750 feet)	53.3 kg (118 lbs)	CF to 1.52 m (60 inches)

SECURLON® L-1000


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	SHT
50 µm (0.002 inch)	1.83 m (72 inches)	305 m (1000 feet)	33 kg (72 lbs)	SHT




*SHT=Sheeting




CF=Centerfold



LFT=Lay-Flat
Tubing



GT=Gusseted
Tubing



G=Gusseted

← Slit
Open Edge

Last updated : 2018-01-11

Catalogue position : **Bagging films**

As the conditions or methods of use, including storage, are beyond our control, Airtech Europe does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech Europe disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. This translation is provided for your convenience only. The official language is English and the official law is Luxembourg.

Data Sheet

COMMONLY USED SIZES

Bagging Films

SECURLON® L-2000

Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	SHT
50 µm (0.002 inch)	3.05 m (120 inches)	152 m (500 feet)	27 kg (60 lbs)	CF to 1.52 m (60 inches)
50 µm (0.002 inch)	1.82 m (72 inches)	305 m (1000 feet)	33 kg (72 lbs)	SHT

STRETCHLON® 850


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	0.60 m (24 inches)	305 m (1000 feet)	22 kg (48 lbs)	LFT
50 µm (0.002 inch)	0.69 m (27 inches)	305 m (1000 feet)	24 kg (54 lbs)	LFT
50 µm (0.002 inch)	0.91 m (36 inches)	305 m (1000 feet)	33 kg (72 lbs)	LFT
50 µm (0.002 inch)	1.22 m (48 inches)	305 m (1000 feet)	44 kg (96 lbs)	LFT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	54 kg (120 lbs)	LFT
50 µm (0.002 inch)	2.03 m (80 inches)	305 m (1000 feet)	54 kg (120 lbs)	LFT
50 µm (0.002 inch)	2.28 m (90 inches)	228 m (750 feet)	61 kg (135 lbs)	LFT

IPPLON® DP1000


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	1.22 m (48 inches)	305 m (1000 feet)	22 kg (48 lbs)	SHT
50 µm (0.002 inch)	1.22 m (48 inches)	305 m (1000 feet)	44 kg (96 lbs)	LFT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	SHT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	54 kg (120 lbs)	LFT
50 µm (0.002 inch)	3.05 m (120 inches)	305 m (1000 feet)	54 kg (120 lbs)	CF to 1.52 m (60 inches)
50 µm (0.002 inch)	4.06 m (160 inches)	229 m (750 feet)	54 kg (120 lbs)	CF to 2.03 m (80 inches)
50 µm (0.002 inch)	4.57 m (180 inches)	229 m (750 feet)	61 kg (135 lbs)	CF to 2.29 m (90 inches)

IPPLON® DPT1000


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	SHT
50 µm (0.002 inch)	1.82 m (72 inches)	305 m (1000 feet)	33 kg (72 lbs)	SHT
50 µm (0.002 inch)	3.05 m (120 inches)	305 m (1000 feet)	54 kg (120 lbs)	SHT
50 µm (0.002 inch)	3.55 m (140 inches)	305 m (1000 feet)	63 kg (140 lbs)	SHT
50 µm (0.002 inch)	4.06 m (160 inches)	229 m (750 feet)	54 kg (120 lbs)	CF to 2.03 m (80 inches)
50 µm (0.002 inch)	4.57 m (180 inches)	229 m (750 feet)	61 kg (135 lbs)	CF to 2.29 m (90 inches)




*SHT=Sheeting




CF=Centerfold



LFT=Lay-Flat
Tubing



GT=Gusseted
Tubing



G=Gusseted

← Slit
Open Edge

Last updated : 2018-01-11

Catalogue position : [Bagging films](#)

Data Sheet

COMMONLY USED SIZES


Bagging Films

IPPLON® KM1300


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	0.60m (24 inches)	305 m (1000 feet)	22 kg (48 lbs)	LFT
50 µm (0.002 inch)	0.69 m (27 inches)	305 m (1000 feet)	25 kg (55 lbs)	LFT
50 µm (0.002 inch)	1.22 m (48 inches)	305 m (1000 feet)	22 kg (48 lbs)	SHT
50 µm (0.002 inch)	1.22 m (48 inches)	305 m (1000 feet)	22 kg (48 lbs)	LFT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	SHT
50 µm (0.002 inch)	1.82 m (72 inches)	305 m (1000 feet)	33 kg (72 lbs)	SHT
50 µm (0.002 inch)	2.03 m (80 inches)	229 m (750 feet)	54 kg (120 lbs)	LFT
50 µm (0.002 inch)	3.05 m (120 inches)	305 m (1000 feet)	54 kg (120 lbs)	CF to 1.52 m (60 inches)
50 µm (0.002 inch)	4.06 m (160 inches)	229 m (750 feet)	54 kg (120 lbs)	CF to 2.03 m (80 inches)
50 µm (0.002 inch)	7.11 m (280 inches)	152 m (500 feet)	63 kg (140 lbs)	CF to 3.56 m (140 inches)
50 µm (0.002 inch)	0.91 m (36 inches)	305 m (1000 feet)	33 kg (72 lbs)	LFT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	54 kg (120 lbs)	LFT
50 µm (0.002 inch)	2.29 m (90 inches)	229 m (750 feet)	61 kg (135 lbs)	LFT
75 µm (0.003 inch)	1.52 m (60 inches)	305 m (1000 feet)	41 kg (90 lbs)	SHT
75 µm (0.003 inch)	1.82 m (72 inches)	305 m (1000 feet)	49 kg (108 lbs)	SHT
75 µm (0.003 inch)	2.71 m (107 inches)	229 m (750 feet)	54 kg (120 lbs)	SHT
75 µm (0.003 inch)	4.06 m (160 inches)	152 m (500 feet)	54 kg (120 lbs)	CF to 2.03 m (80 inches)
75 µm (0.003 inch)	7.11 m (280 inches)	102 m (335 feet)	64 kg (141 lbs)	CF to 3.56 m (140 inches)

IPPLON® WN1500


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	1.22 m (48 inches)	305 m (1000 feet)	44 kg (96 lbs)	LFT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	SHT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	54 kg (120 lbs)	LFT
50 µm (0.002 inch)	2.71 m (107 inches)	305 m (1000 feet)	48 kg (107 lbs)	SHT
50 µm (0.002 inch)	3.05 m (120 inches)	305 m (1000 feet)	54 kg (120 lbs)	CF to 1.52 m (60 inches)
50 µm (0.002 inch)	4.06 m (160 inches)	229 m (750 feet)	54 kg (120 lbs)	CF to 2.03 m (80 inches)
50 µm (0.002 inch)	4.57 m (180 inches)	229 m (750 feet)	61 kg (135 lbs)	CF to 2.29 m (90 inches)
75 µm (0.003 inch)	1.52 m (60 inches)	305 m (1000 feet)	41 kg (90 lbs)	SHT




*SHT=Sheeting




CF=Centerfold



LFT=Lay-Flat
Tubing



GT=Gusseted
Tubing



G=Gusseted

← Slit
Open Edge

Last updated : 2018-01-11

Catalogue position : **Bagging films**

As the conditions or methods of use, including storage, are beyond our control, Airtech Europe does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech Europe disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. This translation is provided for your convenience only. The official language is English and the official law is Luxembourg.

Data Sheet

COMMONLY USED SIZES

Bagging Films

■ WRIGHTLON® 600V


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	0.46 m (18 inches)	305 m (1000 feet)	16 kg (36 lbs)	LFT
50 µm (0.002 inch)	0.60 m (24 inches)	305 m (1000 feet)	22 kg (48 lbs)	LFT
50 µm (0.002 inch)	0.91 m (36 inches)	305 m (1000 feet)	33 kg (72 lbs)	LFT
50 µm (0.002 inch)	1.22 m (48 inches)	305 m (1000 feet)	44 kg (96 lbs)	LFT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	54 kg (120 lbs)	LFT
50 µm (0.002 inch)	2.03 m (80 inches)	229 m (750 feet)	54 kg (120 lbs)	LFT

■ WRIGHTLON® 5400


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	1.21 m (48 inches)	305 m (1000 feet)	44 kg (96 lbs)	LFT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	SHT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	54 kg (120 lbs)	LFT
50 µm (0.002 inch)	1.82 m (72 inches)	305 m (1000 feet)	33 kg (72 lbs)	SHT
50 µm (0.002 inch)	2.03 m (80 inches)	229 m (750 feet)	54 kg (120 lbs)	LFT
50 µm (0.002 inch)	2.03 m (80 inches)	305 m (1000 feet)	36 kg (80 lbs)	SHT
50 µm (0.002 inch)	2.28 m (90 inches)	229 m (750 feet)	61 kg (135 lbs)	LFT
50 µm (0.002 inch)	3.05 m (120 inches)	305 m (1000 feet)	54 kg (120 lbs)	CF to 1.52 m (60 inches)
50 µm (0.002 inch)	4.06 m (160 inches)	229 m (750 feet)	54 kg (120 lbs)	CF to 2.03 m (80 inches)
50 µm (0.002 inch)	4.57 m (180 inches)	229 m (750 feet)	61 kg (135 lbs)	CF to 2.29 m (90 inches)

■ WRIGHTLON® 6400


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	SHT
50 µm (0.002 inch)	1.82 m (72 inches)	305 m (1000 feet)	33 kg (72 lbs)	SHT
50 µm (0.002 inch)	3.05 m (120 inches)	305 m (1000 feet)	54 kg (120 lbs)	CF to 1.52 m (60 inches)
50 µm (0.002 inch)	4.57 m (180 inches)	229 m (750 feet)	61 kg (135 lbs)	CF to 2.29 m (90 inches)




*SHT=Sheeting




CF=Centerfold



LFT=Lay-Flat
Tubing



GT=Gusseted
Tubing



G=Gusseted

← Slit
Open Edge

Last updated : 2018-01-11

Catalogue position : **Bagging films**

As the conditions or methods of use, including storage, are beyond our control, Airtech Europe does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech Europe disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. This translation is provided for your convenience only. The official language is English and the official law is Luxembourg.

Data Sheet

COMMONLY USED SIZES


Bagging Films

■ WRIGHTLON® 7400


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	1.21 m (48 inches)	305 m (1000 feet)	43 kgs (96 lbs)	LFT
50 µm (0.002 inch)	1.37 m (54 inches)	305 m (1000 feet)	49 kg (108 lbs)	SHT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	SHT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	LFT
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	32 kg (72 lbs)	CF to 0.91 m (36 inches)
50 µm (0.002 inch)	1.83 m (72 inches)	305 m (1000 feet)	33 kg (72 lbs)	SHT
50 µm (0.002 inch)	2.03 m (80 inches)	305 m (1000 feet)	36 kg (80 lbs)	SHT
50 µm (0.002 inch)	2.03 m (80 inches)	305 m (1000 feet)	36 kg (80 lbs)	LFT
50 µm (0.002 inch)	2.44 m (96 inches)	305 m (1000 feet)	43 kg (96 lbs)	SHT
50 µm (0.002 inch)	2.72 m (107 inches)	305 m (1000 feet)	48 kg (107 lbs)	SHT
50 µm (0.002 inch)	3.05 m (120 inches)	305 m (1000 feet)	54 kg (120 lbs)	CF to 1.52 m (60 inches)
50 µm (0.002 inch)	4.06 m (160 inches)	229 m (750 feet)	54 kg (120 lbs)	CF to 2.03 m (80 inches)
50 µm (0.002 inch)	0.91 m (36 inches)	305 m (1000 feet)	33 kg (72 lbs)	LFT
50 µm (0.002 inch)	3.56 m (140 inches)	305 m (1000 feet)	63 kgs (140 lbs)	SHT
50 µm (0.002 inch)	3.65 m (144 inches)	229 m (750 feet)	49 kg (108 lbs)	CF to 1.82 m (72 inches)
50 µm (0.002 inch)	4.57 m (180 inches)	229 m (750 feet)	61 kg (135 lbs)	CF to 2.28 m (90 inches)
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	54 kg (120 lbs)	LFT
75 µm (0.003 inch)	1.52 m (60 inches)	305 m (1000 feet)	41 kg (90 lbs)	SHT
75 µm (0.003 inch)	1.83 m (72 inches)	305 m (1000 feet)	49 kg (108 lbs)	SHT
75 µm (0.003 inch)	3.05 m (120 inches)	229 m (750 feet)	61 kg (135 lbs)	CF to 1.52 m (60 inches)
75 µm (0.003 inch)	4.06 m (160 inches)	152 m (500 feet)	54 kg (120 lbs)	CF to 2.03 m (80 inches)

■ WRIGHTLON® 8400


Thickness	Width	Length	Weight/Roll	Forms Available*
50 µm (0.002 inch)	1.52 m (60 inches)	305 m (1000 feet)	27 kg (60 lbs)	SHT
75 µm (0.003 inch)	1.52 m (60 inches)	305 m (1000 feet)	40 kgs (89 lbs)	SHT




*SHT=Sheeting




CF=Centerfold



LFT=Lay-Flat
Tubing



GT=Gusseted
Tubing



G=Gusseted

← Slit
Open Edge

Last updated : 2018-01-11

Catalogue position : **Bagging films**

As the conditions or methods of use, including storage, are beyond our control, Airtech Europe does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech Europe disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. This translation is provided for your convenience only. The official language is English and the official law is Luxembourg.

Data Sheet

COMMONLY USED SIZES

Bagging Films

DAHLAR® RELEASE BAG 125

Thickness	Width	Length	Weight/Roll	Forms Available*
25 µm (0.001 inch)	1.52 m (60 inches)	61 m (200 feet)	2 kg (5 lbs)	SHT
25 µm (0.001 inch)	1.52 m (60 inches)	610 m (2000 feet)	20 kg (50 lbs)	SHT
50 µm (0.002 inch)	1.52 m (60 inches)	610 m (2000 feet)	43 kg (95 lbs)	SHT
50 µm (0.002 inch)	3.05 m (120 inches)	305 m (1000 feet)	43 kg (95 lbs)	CF to 1.52 m (60 inches)

DAHLAR® RELEASE BAG 375


Thickness	Width	Length	Weight/Roll	Forms Available*
70 µm (0.0027 inch)	0.050 m (2 inches)	152 m (500 feet)	1.10 kg (2.4 lbs)	LFT
70 µm (0.0027 inch)	0.101 m (4 inches)	152 m (500 feet)	2.12 kg (4.7 lbs)	LFT
70 µm (0.0027 inch)	0.152 m (6 inches)	152 m (500 feet)	3.18 kg (7.0 lbs)	LFT
70 µm (0.0027 inch)	0.203 m (8 inches)	152 m (500 feet)	4.24 kg (9.3 lbs)	LFT

DAHLAR® RELEASE BAG 460


Thickness	Width	Length	Weight/Roll	Forms Available*
70 µm (0.0027 inch)	0.050 m (2 inches)	152 m (500 feet)	1.35 kg (3 lbs)	LFT
70 µm (0.0027 inch)	0.101 m (4 inches)	152 m (500 feet)	2.69 kg (6 lbs)	LFT
70 µm (0.0027 inch)	0.152 m (6 inches)	152 m (500 feet)	4.04 kg (8.9 lbs)	LFT
70 µm (0.0027 inch)	0.203 m (8 inches)	152 m (500 feet)	5.39 kg (11.9 lbs)	LFT

DAHLAR® RELEASE BAG 500


Thickness	Width	Length	Weight/Roll	Forms Available*
70 µm (0.0027 inch)	0.050 m (2 inches)	152 m (500 feet)	1.48 kg (3.2 lbs)	LFT
70 µm (0.0027 inch)	0.101 m (4 inches)	152 m (500 feet)	2.98 kg (6.5 lbs)	LFT
70 µm (0.0027 inch)	0.152 m (6 inches)	152 m (500 feet)	4.48 kg (9.8 lbs)	LFT
70 µm (0.0027 inch)	0.203 m (8 inches)	152 m (500 feet)	5.98 kg (13.1 lbs)	LFT




*SHT=Sheeting




CF=Centerfold



LFT=Lay-Flat
Tubing



GT=Gusseted
Tubing



G=Gusseted

← Slit
Open Edge

Last updated : 2018-01-11

Catalogue position : [Bagging films](#)

As the conditions or methods of use, including storage, are beyond our control, Airtech Europe does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech Europe disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. This translation is provided for your convenience only. The official language is English and the official law is Luxembourg.